

MODELS 106-PFC / 206-PFC / 306-PFC

Pressure Flow Control (Modulation) Valve

KEY FEATURES

- Reduces downstream pressure when demand is low to reduce leakage and pipe breaks.
- Compensates for pressure loss in the pipe to keep a fairly constant pressure at a distant point. This reduces the pressure during low flow in most of the system.
- Simple to set-up and adjust.
- Maximum pressure increase can be limited by simple adjustment.
- Pressure increase is adjustable.

PRODUCT OVERVIEW

The 106-PFC / 206-PFC / 306-PFC Pressure Flow Control Valve is a pressure reducing valve with a special (Patented) pilot that increases downstream pressure as flow increases.


The PFC valve controls the downstream pressure as a function of flow. This increased downstream pressure compensates partially for pipe friction and therefore maintains a relatively constant pressure at some remote location. The PFC valve will deliver consistent performance without any electrical components and is not affected by flooding. The valve can be used wherever a standard PRV is installed.

Please note that the downstream (controlled) pressure increases from low flow to selected maximum flow but reduces at flows higher than the selected maximum. This is due to the increased pressure drop of the orifice plate. If this reduction of the controlled pressure past the design maximum flow is a problem, contact us or your Singer® representative for an engineered solution.



TYPICAL APPLICATION

An orifice plate immediately downstream of the PFC Control Valve produces 3 psi / 0.2 bar pressure drop, at maximum flow. This pressure differential is applied to each side of an actuating diaphragm which is connected to the yoke of the pressure reducing pilot. Increasing the differential raises the pilot setting and raises downstream pressure to maintain virtually steady pressure on a critical distance user.

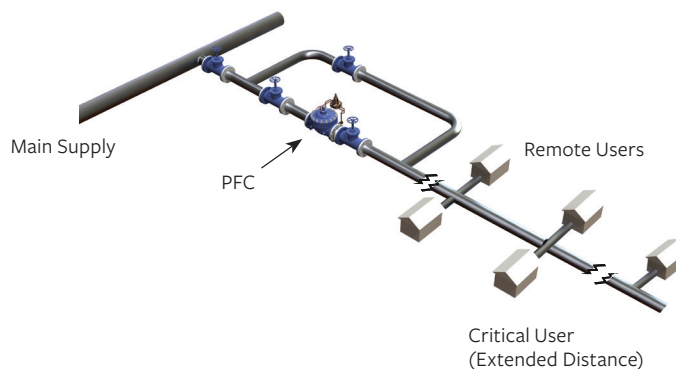


MODELS 106-PFC / 206-PFC / 306-PFC

Pressure Flow Control (Modulation) Valve

SCHEMATIC DRAWING

NO.	PART
1	Main Valve - 106-PG, 206-PG or 306-PG
2	Isolation Valve (2A, 2B, 2C)
3	Strainer - 40 Mesh
4	Model 26 Flow Stabilizer / Opening speed Control Standard on 8" (200 mm) 106 / 10" (250 mm) 206 and Smaller Optional on 10" (250 mm) 106 / 12" (300 mm) 206 and Larger
5	Fixed Restriction
6	Model 160-PFC Pressure / Flow Control Pilot
7	Orifice housing and plate
8	Test Valve
9	Speed Control
10	Fixed Restriction
11	PIP Adjustment - Model 852-B

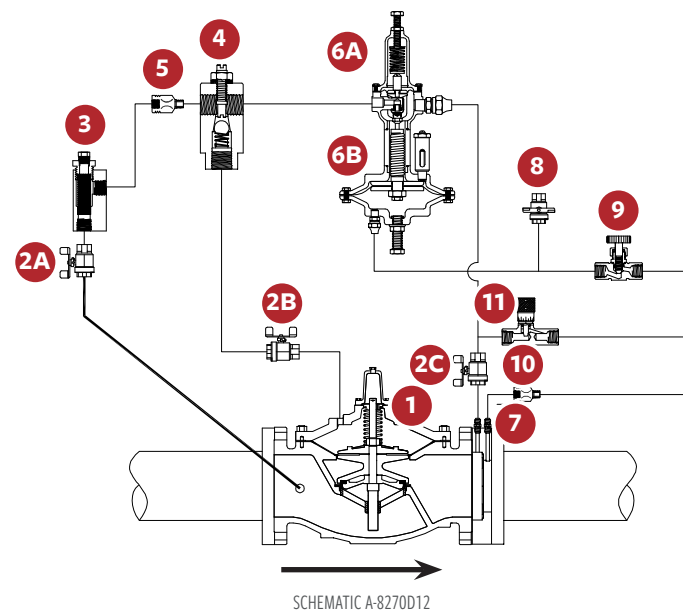

SELECTION SUMMARY

- The Singer® model 106-PFC / 206-PFC / 306-PFC should be sized as a normal pressure reducing valve. Refer to section 106-PR / 206-PR for size selection and main pilot spring ranges.
- Installation is the same as a standard pressure reducing valve. See section 106-PR / 206-PR / 306-PR.
- Maximum pressure increase over base setting:
35 psi / 2.4 bar
- For correct application provide
 - Maximum & minimum inlet pressure and base (minimum) outlet pressure setting
 - Maximum & minimum flow rates
 - Pressure increase _____ psi / _____ bar at _____ USGPM / L/s
 - Maximum pressure increase at any flow _____ psi / _____ bar
- Ensure the flange ratings exceed the maximum working pressure

ORDERING INSTRUCTIONS

Refer to the order form and ordering instructions.

Additionally, include the following information for this product:

- Single chamber (106), (206) or (306)
- Outlet pressure range
- Minimum / maximum flow rate
- Pressure increase at high flow

MODELS 106-PFC / 206-PFC / 306-PFC

Pressure Flow Control (Modulation) Valve

106-PFC

FLOW CAPACITY

(SEE 106-PG IN MAIN VALVE SECTION FOR OTHER VALVE DATA)

Size (Inches)	3"	4"	6"	8"	10"	12"	14"	16"	20"	24"	36"
Size (mm)	80 mm	100 mm	150 mm	200 mm	250 mm	300 mm	350 mm	400 mm	500 mm	600 mm	900 mm
Minimum Continuous (USGPM) Flat Diaphragm	5	10	20	40	-	-	-	-	-	-	-
Minimum Continuous (USGPM) Rolling Diaphragm	-	-	1	1	3	3	3	3	10	10	20
Minimum Continuous (L/s) Flat Diaphragm	0.3	0.6	1.3	2.5	-	-	-	-	-	-	-
Minimum Continuous (L/s) Rolling Diaphragm	-	-	0.1	0.1	0.2	0.2	0.2	0.2	0.6	0.6	1.3
Maximum Continuous (USGPM)	460	800	1800	3100	4900	7000	8500	11000	17500	25800	55475
Maximum Continuous (L/s)	29	50	114	196	309	442	536	694	1104	1628	3500

206-PFC

FLOW CAPACITY

(SEE 206-PG IN MAIN VALVE SECTION FOR OTHER VALVE DATA)

Size (Inches)	4"	6"	8"	10"	12"	16"	18"	20"	24 x 6"	24 x 20"	28"	30"	32"	36"	40"	48 in
Size (mm)	100 mm	150 mm	200 mm	250 mm	300 mm	400 mm	450 mm	500 mm	600 x 400 mm	600 x 500 mm	700 mm	750 mm	800 mm	900 mm	1000 mm	1200 mm
Minimum Continuous (USGPM) Flat Diaphragm	5	10	20	40	-	-	-	-	-	-	-	-	-	-	-	-
Minimum Continuous (USGPM) Rolling Diaphragm	-	-	-	-	3	3	3	3	3	3	10	10	10	10	20	20
Minimum Continuous (L/s) Flat Diaphragm	0.3	0.6	1.3	2.5	-	-	-	-	-	-	-	-	-	-	-	-
Minimum Continuous (L/s) Rolling Diaphragm	-	-	-	-	0.2	0.2	0.2	0.2	0.2	0.2	0.6	0.6	0.6	0.6	1.3	1.3
Maximum Continuous (USGPM)	580	1025	2300	4100	6400	9230	16500	16500	16500	21700	33600	33650	33700	33800	55475	55475
Maximum Continuous (L/s)	37	65	145	259	404	582	1040	1040	1040	1370	2120	2123	2126	2132	3500	3500

306-PFC

FLOW CAPACITY

(SEE EN106-PG IN MAIN VALVE SECTION FOR OTHER VALVE DATA)

Size	DN80	DN100	DN150	DN200	DN250	DN300	DN350	DN400
Minimum Continuous (L/s) Flat Diaphragm	0.06	0.13	0.25	-	-	-	-	-
Minimum Continuous (L/s) Rolling Diaphragm	-	-	-	0.06	0.06	0.20	0.20	0.20
Maximum Continuous (L/s)	22	37	67	150	267	417	560	600